



## Innovative Core Design Locating an Internal Ballcheck within a Metal Seated Valve

Patented design eliminates operator error, improves safety and reliability

- Improves safety by eliminating false level readings during commissioning
- Quarter turn position visible handle indicates open or closed
- Low emission certified to API 641 & ISO 15848-1
- Meets API Class V shut-off requirements
- 900# ANSI Pressure Rating
- All wetted components comply with NACE MR0103 and MR0175
- Clean-out port allows for quick inspection of internals or as a flushing port
- Lock-out / tag-out capable, standard

### Innovative Design Guarantees Proper Commissioning

The Jerguson 360 Series valve is equipped with many features that elevate its performance above traditional style safety ballcheck valves. Designed to alleviate a widespread problem, the 360 Series' bypass mode seeks to remove guess work or operator error during commissioning. The quarter turn position — visible handle provides clear operation status and a locking pin to secure its position. Patent # US9,377,113 B2

### Simplified Commissioning

As opposed to traditional ballcheck valves, it is impossible to get a false level reading with a 360 Series valve during commissioning. When using a traditional ballcheck valve and commissioning a gage assembly when there is already liquid present in the vessel, it is common for the operator to open the valve too quickly, causing the ballcheck to engage and the level gage to display a false level reading!


Simplified Commissioning: Watch for the video at [www.jerguson.com/safety\\_ballcheck\\_valves](http://www.jerguson.com/safety_ballcheck_valves)



With liquid present in the vessel, open the top valve to By-Pass position.



Then open the bottom valve to the bypass position. Fluid will now flow through the valve and into the glass without seating the ballcheck.

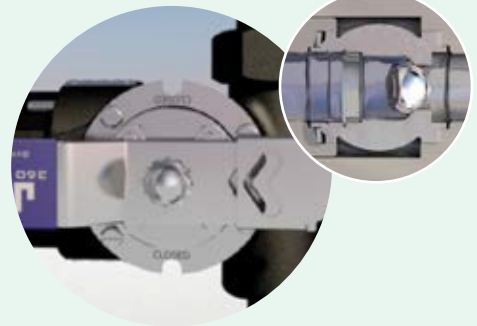

Once the level stops rising, move both valves to the run position. Now, the valves are ready for normal operation. If your level gage is not maintained properly or a leak occurs, the ballcheck will engage and isolate the gage from the vessel.

# Liquid Level Valves

## How to Specify 360 Series Safety Ballcheck Valves

364S-A-1-A04-A04-A04-

Gage Connection Type  
Code Description

3S Set, Non-Union Gage Connection  
4S Set, Union Gage Connection  
3T Top Valve, Non-Union Gage Connection  
3B Bottom Valve, Non-Union Gage Connection  
4T Top Valve, Union Gage Connection  
4B Bottom Valve, Union Gage Connection

Body Material  
Code Description

A A105N Carbon Steel  
T A182 316/316L Stainless Steel  
LC Hastelloy C276

Trim Material  
Code Description

1 316SS Nitride Coated Seat & Ball; Inconel Stem  
2 Hastelloy C276 Ball & Stem; Teflon Seat

Process Connection  
Style Code Description Size Code Description Sizes Valid with Styles

A FNPT 04 1/2" (DN15) A, B, C, D, F, G  
B FSW 06 3/4" (DN20) A, C, D, F, G  
C MNPT 08 1" (DN25) C, D, F, G  
D MSW 12 1-1/2" (DN40) F, G  
F RF ASME Flange 16 2" (DN50) F, G  
G RF DIN Flange 00 N/A K  
K No Connection

Options  
Code Description



Blank Standard  
WN Weld Neck Flanges  
RJ Ring Joint Flanges  
SG Spherical Union Gage Connection

Clean-Out Connection Size  
Code Description Note

A04 1/2" FNPT Factory Default when 1/2" size vent/drain is specified  
A06 3/4" FNPT Factory Default when 3/4" size vent/drain is specified  
\*Contact factory for special connections

Vent or Drain Connection  
Style Code Description Size Code Description Sizes Valid with Styles

A FNPT 04 1/2" (DN15) A, B, F, G  
B FSW 06 3/4" (DN20) A, B, F, G  
F RF ASME Flange 08 1" (DN25) F, G  
G RF DIN Flange 12 1-1/2" (DN40) F, G  
K No Connection 16 2" (DN50) F, G  
00 N/A K

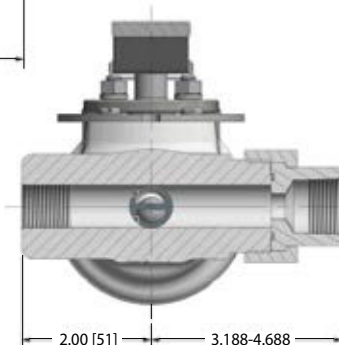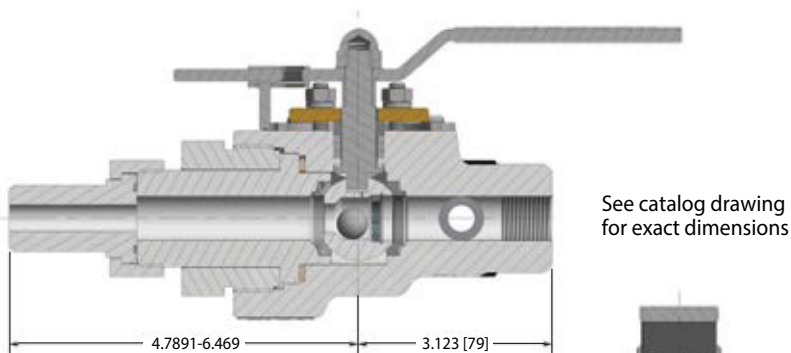

Carbon Steel  
Series 360 Temperature / Pressure

Temperature		Pressure			
°F	°C	PSI	BarG	Kg/cm <sup>2</sup>	kPaG
100	38	2220	153	156	15306
200	93	2035	140	143	14031
300	149	1965	135	138	13548
400	204	1900	131	134	13100
500	260	1810	125	127	12480
600	316	1705	118	120	11756
700	371	1590	110	112	10963
800	427	1235	85	87	8515

Not recommended for steam service

316SS  
Series 360 Temperature / Pressure

Temperature		Pressure			
°F	°C	PSI	BarG	Kg/cm <sup>2</sup>	kPaG
100	38	2160	149	152	14893
200	93	1860	128	131	12824
300	149	1680	116	118	11583
400	204	1540	106	108	10618
500	260	1435	99	101	9894
600	316	1355	93	95	9342
700	371	1305	90	92	8998
800	427	1265	87	89	8722

Not recommended for steam service